

LE- series

LE2



LE3,4,5




- Strong SS platform.
- Indicator bracket for wall or table mount.
- Re-chargeable battery, 10 hours continuous use.
- RS-232C.
- 25 mm wide angle “easy-to-read” LCD display with backlight.
- NET / GROSS function.
- TARE function.
- Unit conversion.

***“INNOVATIVE APPLICATIONS
LATEST TECHNOLOGY
LONG EXPERIENCE”***

Specifications are subject to change without notice.

LE series specifications:

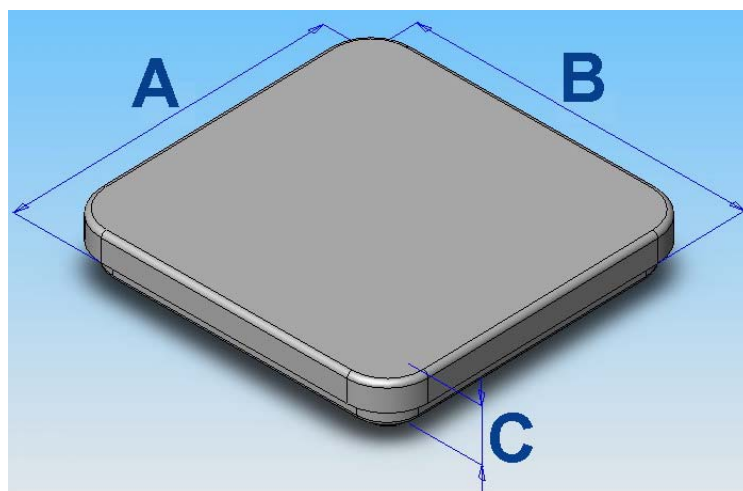

Dimensions and Capacity:

Model:	A	B	C	Capacity:	Division:	Net Weight:
LE2-30	325 mm	320 mm	52 mm	30 kg	10 g	3,8 kg
LE2-60	325 mm	320 mm	52 mm	60 kg	20 g	3,8 kg
LE2-150	325 mm	320 mm	52 mm	150 kg	50 g	3,8 kg
LE3-150	450 mm	350 mm	60 mm	150 kg	50 g	6,3 kg
LE4-300	600 mm	600 mm	60 mm	300 kg	100 g	11 kg
LE5-300	950 mm	500 mm	70 mm	300 kg	100 g	15,5 kg

Power requirement:

Adapter specification:	Input: 100/230V AC 50 ~ 60Hz Output: 12V / 1000mA
Built in battery:	7,2V / 0,8Ah, rechargeable
Continues operation time:	10 hours continues use
Auto off function:	Yes

General:

Operating temperature	0°C to 40°C
Operating humidity	< 85%RH Max. (Non-condensing)

Authorized Dealer:

Specifications are subject to change without notice.